
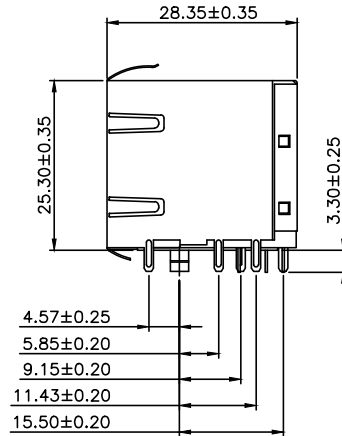


RoHS Compliant

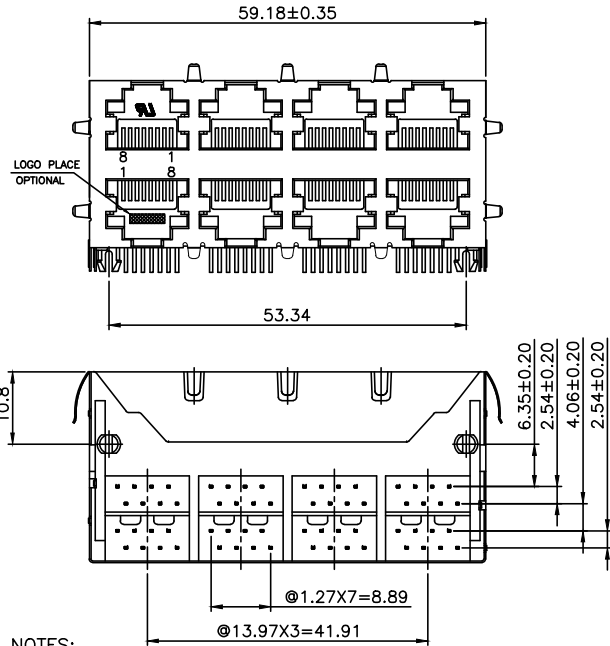

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 50 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

- HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
- SHIELD MATERIAL : BRASS
- CONTACT MATERIAL : PHOSPHOR BRONZE t=0.35mm.
- PLATING : GOLD PLATING OVER NICKEL.
- OPERATING LIFE : 750 CYCLES MIN.
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:


- STORAGE : -40°C TO +85°C.
- OPERATION: -40°C TO +85°C.
- WAVE SOLDERING TEMPERATURE: 230~240°C(3~5 SECONDS).

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

PART NUMBER: ZW2908-XD7C14X

Gold Thickness:
 1-3u" 2-6u" 3-15u"
 4-30u" 5-50u" F-Gold Flash

- 0- W/O LOGO
- 1- W/ "ZSNOW" LOGO
- 2- W/ "F" LOGO

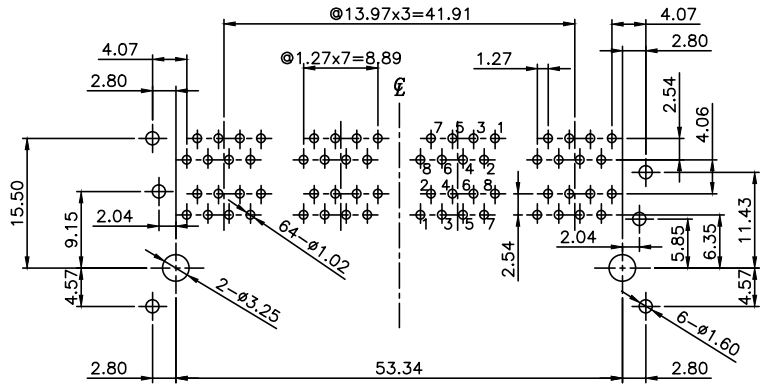

PC Board Layout Component Side Shown
 PC Board Thickness=1.6mm

QC : Inspection Item	DIMENSION IN mm [Inch]		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER	DRAWING NUMBER
	.X± 0.30	X.°± 2.0'	SEE NOTE	ZW2908-XD7C14X
	.XX± 0.20	.X°± 1.0'	TITLE	
.XXX± 0.10		RJ45 STACKED GANGED JACK, 2X4		
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1
TIM	HAPPY	ZERO	3 : 2	REV P1
04/23/20'	04/23/20'	04/23/20'	SIZE A4	

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM NINGBO ZSNOW ELECTRONICS CO.,LTD.