
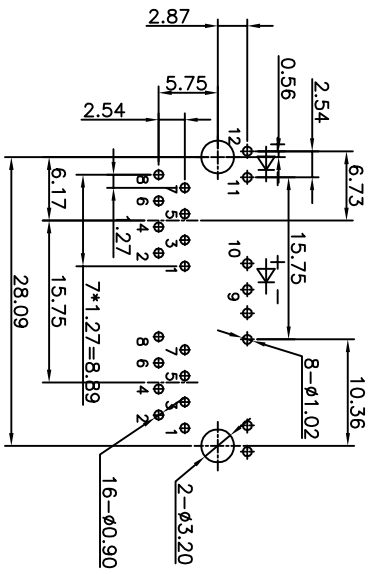


RoHS Compliant

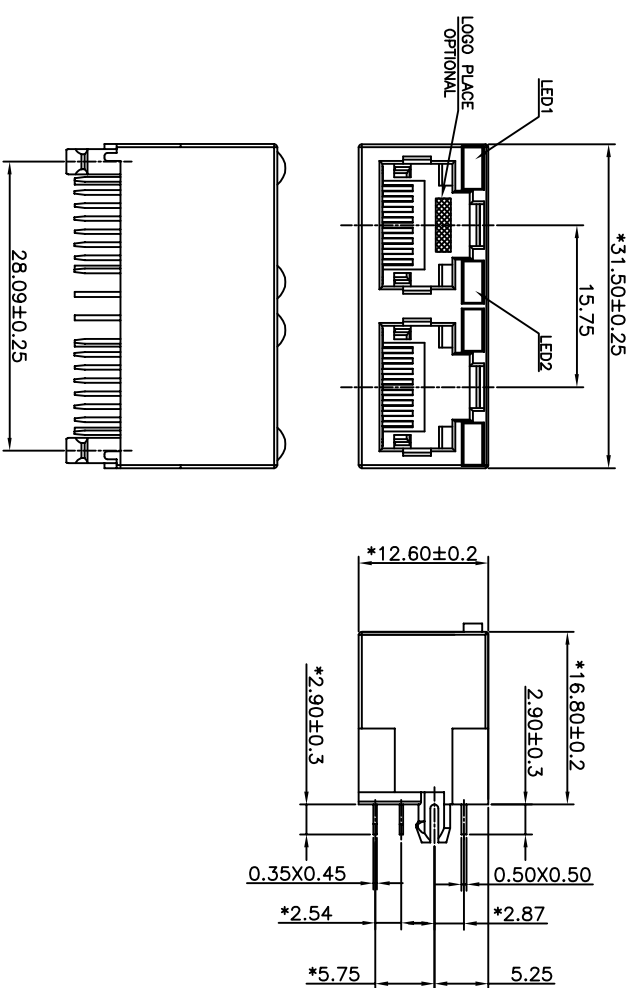

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS.
- CURRENT RATING : 1.5 AMP.
- CONTACT RESISTANCE : 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
- DIELECTRIC STRENGTH: 1000 VDC RMS 60Hz, 1MIN.
- OPERATING: 750 CYCLES MIN.

MECHANICAL:

- HOUSING MATERIAL : NYLON UL94V-0.
- CONTACT MATERIAL : PHOSPHOR BRONZE 0.35mm THICKNESS
- PCB RETENTION PRE-SOLDER : 1 LB MIN.
- PCB RETENTION POST-SOLDER: 10 LBS MIN.

ENVIRONMENTAL:

- STORAGE : -40°C TO $+85^{\circ}\text{C}$.
 - OPERATION: -40°C TO $+85^{\circ}\text{C}$.
 - WAVE SOLDERING TEMPERATURE: $250 \sim 260^{\circ}\text{C}$ (3~5 SECONDS).
- MATES WITH MODULAR PLUG CONFORMING TO
FCC PART 68, SUBPART F.
CUL FILE NO. E345295

RoHS PART NUMBER: ZW2288-2CXXS2X

PLATING:
1-3u" 2-6u" 3-15u"
4-30u" 5-50u" F-GOLD FLASH(0.3u" MIN)

10-W/ZSNOW LOGO, NYLON YELLOW 114C
LED1: GREEN, LED2: AMBER

: Inspection Item		DRAW		PROJ.		SCALE		SIZE		REV	
DIMENSION IN mm [Inch]		PART NUMBER		SHEET		2:1		A3		P1	
TOLERANCE UNLESS OTHERWISE SPECIFIED		SEE NOTE		1 OF 1							
.X \pm 0.30 X . \pm 2.0"		ZSNOW ELECTRONIC CO., LTD									
.XX \pm 0.20 X . \pm 1.0"		DRAWING NUMBER									
.XXX \pm 0.10 X . \pm 1.0"		ZW228X-2CXXS2X-3									
APPROVE		TITLE									
TritLae 2020.01.08		R145 TOP ENTRY W/LED JACK									
CHECK											
Happy-Huong 2020.01.08											