

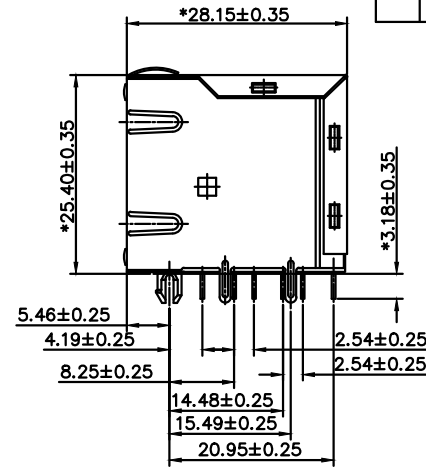


RoHS Compliant

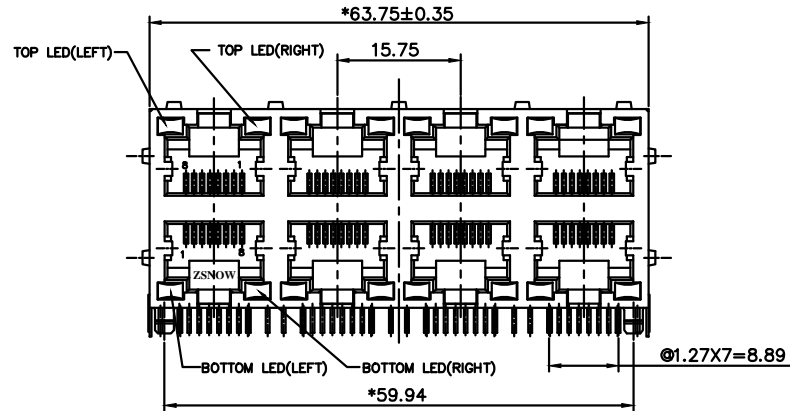

PART NUMBER: ZW2J88-XV4TYBX

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 50 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0./COLOR: BLACK.
2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
3. PLATING : GOLD PLATING OVER NICKEL.
4. OPERATING LIFE : 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE : -40°C TO $+85^{\circ}\text{C}$.
2. OPERATION: -40°C TO $+85^{\circ}\text{C}$.

MATES WITH MODULAR PLUG CONFORMING TO


FCC PART 68, SUBPART F.

RoHS PART NUMBER: ZW2J88-XXXTYBX

0-W/O LOGO
1-W/ ZSNOW LOGO

Gold Thickness:
1-3u" 2-6u"
3-15u" 4-30u"
5-50u" F-GOLD FLASH

A4-RIGHT: GREEN LEFT: GREEN
B4-RIGHT: ORANGE LEFT: GREEN
C4-RIGHT: YELLOW LEFT: GREEN
L4-RIGHT: GREEN LEFT: YELLOW
V4-RIGHT: GREEN+YELLOW LEFT: GREEN+YELLOW

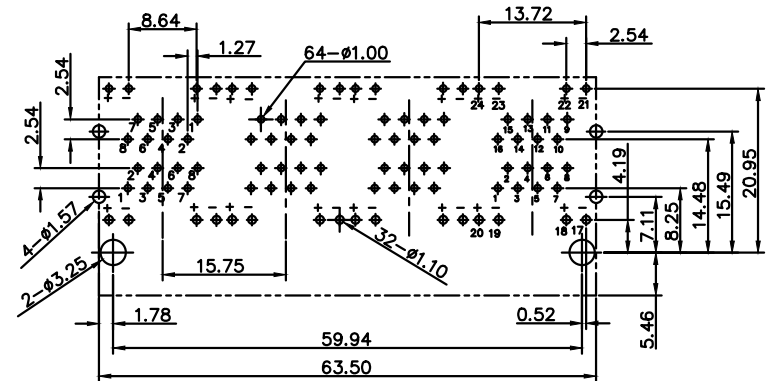

PC Board Layout Component Side Shown
PC Board Thickness=1.6mm
Tolerance ± 0.05

QC : Inspection Item	DIMENSION IN mm [Inch]		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED		PART NUMBER	DRAWING NUMBER
	.X \pm 0.30 X.* \pm 2.0*		SEE NOTE	ZW2J88-XXXTYBX
	.XX \pm 0.20 .X* \pm 1.0*		TITLE	
.XXX \pm 0.10		MINI 2X4 LED JACK		
CPK : Cp/Cpk and SPC Control Item	APPROVE	CHECK	DRAW	PROJ
	SKYCHEN 12/28/10'	ANKUE 12/28/10'	CZH 10/13/10'	SCALE 3 : 1
		SHEET 1 OF 1		REV P1

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN ZSNOW ELECTRONICS PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM ANISO ZSNOW ELECTRONICS CO.,LTD.