
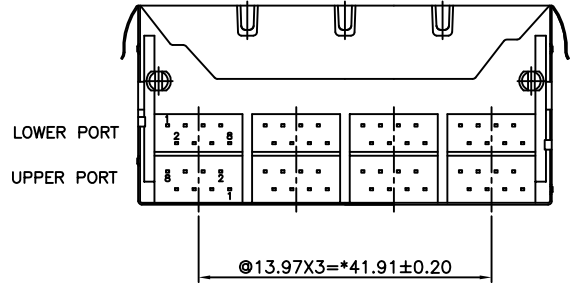


RoHS Compliant

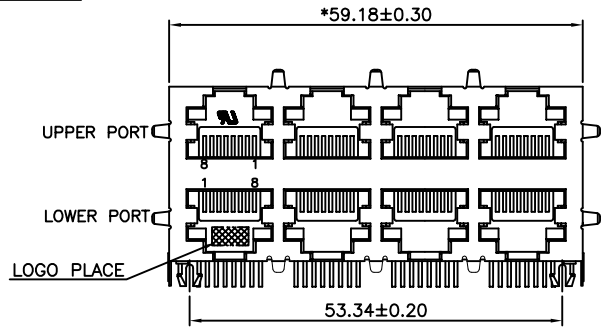

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 60 MILLIOHMS MAX.
4. INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 500 VDC.
5. DIELECTRIC STRENGTH : 1000 VDC RMS 60Hz, 1MIN.

MECHANICAL:

1. HOUSING MATERIAL : PBT UL94V-0./COLOR:BLACK.
2. INSERT MATERIAL : PBT UL94V-0./COLOR:BLACK.
3. SHIELD MATERIAL : BRASS.
4. CONTACT MATERIAL : PHOSPHOR BRONZE  $t=0.35\text{mm}$ .
5. PLATING : GOLD PLATING OVER NICKEL.
6. OPERATING LIFE : 750 CYCLES MIN.
7. PCB RETENTION PRE-SOLDER : 1 LB MIN.
8. PCB RETENTION POST-SOLDER : 10 LBS MIN.

ENVIRONMENTAL:



1. STORAGE :  $-40^{\circ}\text{C}$  TO  $+85^{\circ}\text{C}$ .
2. OPERATION:  $-40^{\circ}\text{C}$  TO  $+85^{\circ}\text{C}$ .
3. WAVE SOLDERING TEMPERATURE:  $230^{\circ}\text{C} \sim 240^{\circ}\text{C}$  (3~5 SECONDS).
4. RoHS COMPLIANT.

MATES WITH MODULAR PLUG CONFORMING TO  
FCC PART 68, SUBPART F.

CUL FILE NO.E345295

PART NUMBER: ZW2908-XDZC14X

0-W/O LOGO  
1-W/ ZSNOW LOGO  
2-W/ F LOGO  
1-3u" 2-6u" 3-15u"  
4-30u" 5-50u" F-GOLD FLASH

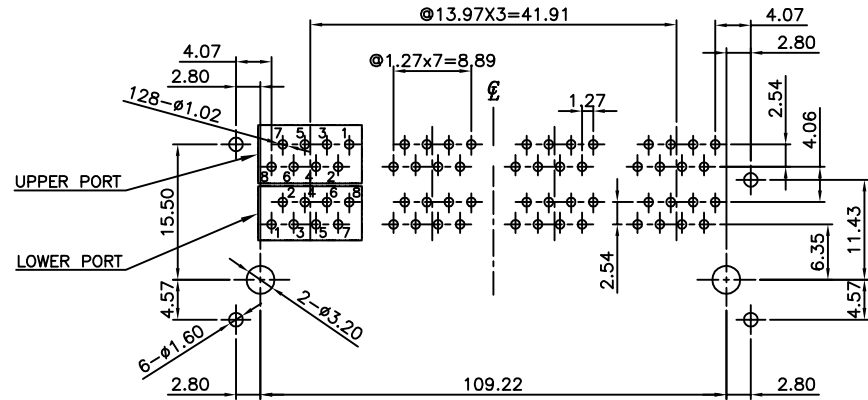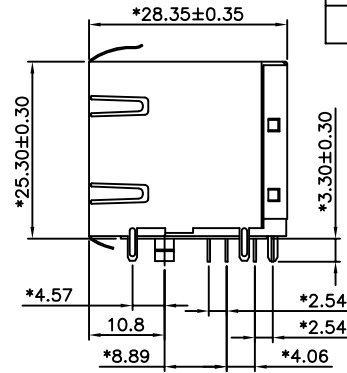

PC Board Layout Component Side View  
PC Board Thickness=1.6mm  
Tolerance $\pm 0.05$

Inspection Item	DIMENSION IN mm [Inch]		ZSNOW ELECTRONIC CO., LTD	
	TOLERANCE UNLESS OTHERWISE SPECIFIED			
	.X $\pm$ 0.30 X.* $\pm$ 2.0*		SEE NOTE	ZW2908-XDZC14X
	.XX $\pm$ 0.20 .X.* $\pm$ 1.0*		TITLE	
	.XXX $\pm$ 0.10		RJ45 STACKED GANGED JACK, 2X4	
APPROVE	CHECK	DRAW	PROJ.	SHEET 1 OF 1
TIMLEE 12/01/15'	ZERO 12/01/15'	HAPPY 12/01/15'		REV P1
		SCALE 3 : 2	SIZE A3	